


Facade luminaire



54IP

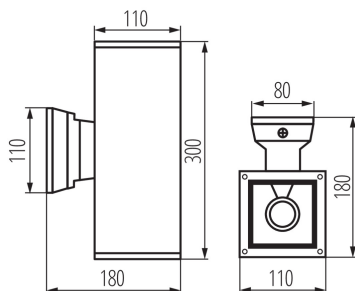

A series of facade Kanlux LART luminaires is a raw and at the same time classic line of facade luminaires in a casing made of aluminium. The external surface of the luminaire is completed in a graphite colour. Kanlux LART look perfect both on a single basis and in combination of several luminaires - subtly complementing light arrangements on terraces or facades of buildings.

GENERAL DATA:

Colour: anthracite

Place of assembly: wall mounted

Place of application: Indoors and outdoors

Minimum distance from the illuminated object: 0,5m

Compatible with a dimmer: no

RAL: 7016

Replaceable light source: yes

Light source included: no

Fixture lighting direction: up and down

Length [mm]: 110

Width [mm]: 180

Height [mm]: 300

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC

Rated frequency [Hz]: 50/60

Maximum power [W]: 2x max 60

Class of protection against electric shock: I

Lampshade material: glass

Light source: GLS/CFL/LED

Cap: E27

Ambient temperature range to which the product can be exposed: -20÷25

The fixture is adapted to the light sources of the following energy classes: A++,A+,A,B,C,D,E

Enclosure material: aluminum alloy

Panel/frame material: aluminum alloy

Basic fixture material: aluminum alloy

Protective glass material: glass

Connection type: Bolt terminal block

Range of sections of wires used [mm²]: 1÷2,5

IP class: 54

Facade luminaire

