
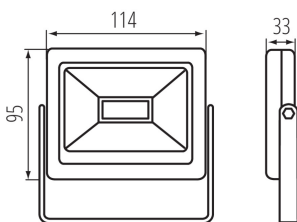


31181 GRUN v3 LED-20-B

LED floodlight

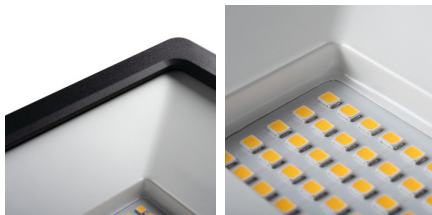


GENERAL DATA:

Colour: black
Place of assembly: wall mounted, ceiling mounted
Place of application: for industrial applications
Minimum distance from the illuminated object: 0,5m
Compatible with a dimmer: no
Width [mm]: 114
Height [mm]: 95
Depth [mm]: 33
Integrated LED light source: yes

TECHNICAL DATA:

Rated voltage [V]: 220-240 AC
Rated frequency [Hz]: 50
Class of protection against electric shock: I
Diode type: LED SMD
Luminous flux [lm]: 1800
Colour temperature: white
Correlated colour temperature [K]: 4000
Colour consistency in McAdam ellipses: ≤6
Colour rendering index: 80
Service life [h]: 20000
Number of on/off cycles: ≥15000
Ambient temperature range to which the product can be exposed: -15÷35
Enclosure material: aluminum alloy, plastic
Protective glass material: Tempered glass
Extension-arm material: steel
Connection type: Free cable ends
Wire diameter [mm²]: 1
Reflector type: symmetrical
Lamp-heating time [s]: ≤0,5
Lamp-ignition time [s]: ≤0,5
The fixture is movable vertically [°]: 180
IP class: 65

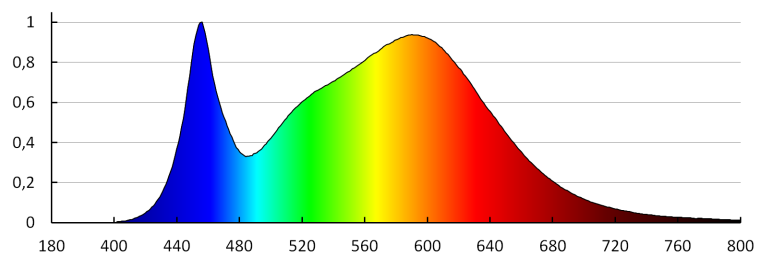

31181 GRUN v3 LED-20-B

LED floodlight

