

14936 TANO G4 SMD-WW

LED light source



Kanlux TANO LED are light sources with G4 screw. This highly durable source has a very wide illumination angle (300°), perfect for sconces, lamps and other night luminaires matching light source with G4 screw.

GENERAL DATA:

Colour: white

Lamp designed for decorative lighting: Not applicable

Compatible with a dimmer: no

Height [mm]: 35

Diameter [mm]: 10

TECHNICAL DATA:

Rated voltage [V]: 12 DC

Lamp-power factor: 0.4

Rated power [W]: 1.5

Material: plastic

Light source: JC

Diode type: LED SMD

Rated useful luminous flux [lm]: 100

Colour temperature: Warm white

Colour temperature [K]: 3000

Colour uniformity [SDCM]: ≤6

Colour-rendering index Ra: ≥80

Rated lamp-service life [h]: 20000

Number of on/off cycles: ≥20000

Rated beam angle [°]: 300

Rated light level [°]: 300

Light source EEL: A+

Lamp rated current [mA]: 130

Annual power consumption [kWh/1000h]: 2

Luminous efficiency of the lamp [lm/W]: 67

Ignition time [s]: ≤0,5

Lamp-heating time to 60% of the full luminous flux [s]:
Negligible

Lamp-heating time to 95% [s]: <2

Lamp premature-failure indicator: <5% po 1000h

Lamp service life factor after the period of 6000h [%]:
≥90


Luminous flux retention factor at the end of rated service life [%]: ≥70

Luminous flux retention factor after the period of 6000h [%]: ≥80

Declaration of equality in power rating [W]: 11

14936 TANO G4 SMD-WW

LED light source

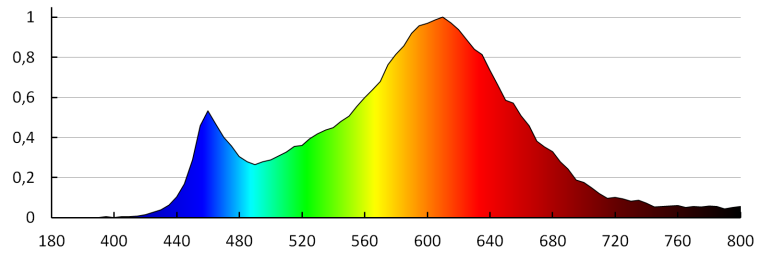

KANLUX S.A. (kat 14936) TANO G4 SMD-WW / LDC (Polar)

Luminaire: KANLUX S.A. (kat 14936) TANO G4 SMD-WW
Lamps: 1 x TANO G4 SMD-WW

